




# CIVILPRO

## GENERATOR & WELDER

# RENTALS & HIRE

0411 961 231 [WWW.CIVILPRO.COM.AU](http://WWW.CIVILPRO.COM.AU)

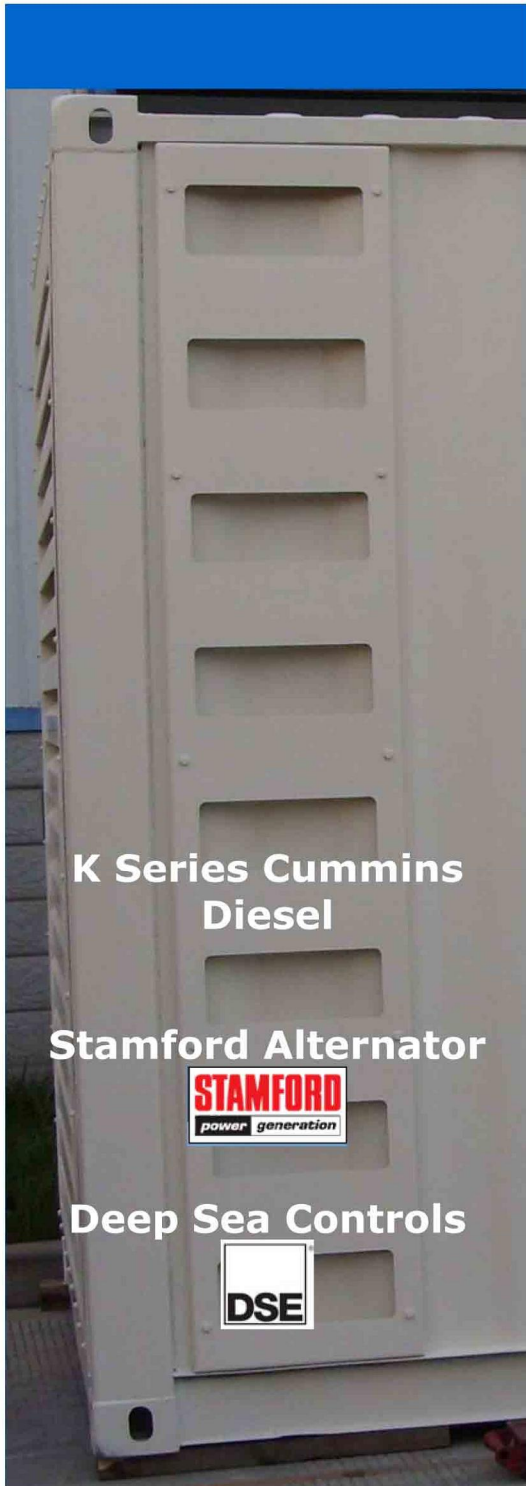

### Technical

<b>Model</b>	OZC625SA
<b>Type</b>	Heavy Duty
<b>Speed</b>	1500 RPM
<b>Phase/Voltage</b>	3, 240 / 415
<b>Frequency</b>	50 Hz
<b>Stdby Power kVA/kW</b>	685 kVA / 548 kW
<b>Prime Output kVA / kW</b>	625 kVA / 500 kW
<b>Noise Level (dBA @ 7m)</b>	73dB(A)
<b>Fuel Capacity</b>	1600 Litres

### Engine

<b>Manufacturer</b>	Cummins Diesel
<b>Engine Model</b>	KTA19G6A
<b>Type &amp; Cylinder</b>	4 Stroke - 6 L
<b>Induction</b>	Turbocharged After Cooled
<b>Fuel Consumption</b>	127 L @ 100%, 95 L @ 75%, 64 L @ 50% Load
<b>Coolant Capacity</b>	91 L
<b>Governor</b>	Electronic
<b>Cubic Capacity</b>	19 L
<b>Oil Capacity</b>	50 L
<b>Warranty</b>	World Wide as per 3381307 Publication

### Alternator

<b>Alternator Brand / Model</b>	Stamford / HC5F
<b>Type</b>	Brushless
<b>Harmonic Distortion</b>	Less than 5%
<b>Protection Class</b>	IP 23
<b>Insulation Class</b>	Class H

### Canopy

<b>Container</b>	Refurbished 20' Container
<b>Paint Finish</b>	Heavy duty powder coat finish white
<b>Emergency Stop</b>	External Emergency Stop Fitted

### Dimensions & Weight

<b>Length</b>	6m
<b>Width</b>	2.4m
<b>Height</b>	3.0m
<b>Weight</b>	8100 Kg

### Controls

<b>Controller</b>	Deep Sea 5220 with LCD Display
<b>Circuit Breaker</b>	ABB Moulded Case 3 Pole
<b>Battery Isolator</b>	Fitted with canopy adjacent battery

### Options

<b>Synchronizing</b>	Grid / Mains, Max Demand Lopping, Power Stations
<b>Protection</b>	RCD/ELCB IP30 or IP66
<b>PMG</b>	MX341 or MX321